

Received March 19, 2021, accepted April 24, 2021, date of publication May 26, 2021, date of current version June 3, 2021.

Digital Object Identifier 10.1109/ACCESS.2021.3083928

Application of Neural Network Predictive Control Methods to Solve the Shipping Container Sway Control Problem in Quay Cranes

SERGEJ JAKOVLEV^{1,2}, TOMAS EGLYNAS¹,
AND MIROSLAV VOZNAK^{1,2}, (Senior Member, IEEE)

¹Marine Research Institute, Klaipeda University, 92294 Klaipeda, Lithuania

²Department of Telecommunications, Faculty of Electrical Engineering and Computer Science, VSB–Technical University of Ostrava, 708 00 Ostrava, Czech Republic

Corresponding author: Sergej Jakovlev (s.jakovlev.86@gmail.com)

This work was supported by the European Regional Development Fund through the Research Council of Lithuania (LMTLT) under Project 01.2.2-LMT-K-718-03-0001.

ABSTRACT Smart control systems are mostly applied in industry to control the movements of heavy machinery while optimizing overall operational efficiency. Major shipping companies use large quay cranes to load and unload containers from ships and still rely on the experience of on-site operators to perform transportation control procedures using joysticks and visual contact methods. This paper presents the research results of an EU-funded project for the Klaipeda container terminal to develop a novel container transportation security and cargo safety assurance method and system. It was concluded that many risks arise during the container handling procedures performed by the quay cranes and operators. To minimize these risks, the authors proposed controlling the sway of the spreader using a model predictive control method which applies a multi-layer perceptron (MLP) neural network (NN). The paper analyzes current neural network architectures and case studies and provides the engineering community with a unique case study which applies real operation statistical data. Several key training algorithms were tested, and the initial results suggest that the Levenberg–Marquardt (LM) algorithm and variable learning rate backpropagation perform better than methods which use the multi-layer perceptron neural network structure.

INDEX TERMS Neural nets, data mining, control systems.

I. INTRODUCTION

The logistics sector is constantly looking for a better way to decrease the costs associated with port handling operations, including maintenance costs, long operational delays, and human error during technical procedures. Most containers are handled by heavy machinery and operated under even less optimal standardized procedures and control systems, including those applied at the Klaipeda container terminal. Factors such as different container weights, wind gusts, operator experience and control routines often cause containers to sway chaotically during their transportation from ships. It is increasingly challenging to stabilize containers carried by quay crane spreaders because of their large weights and sizes [1]. Engineering and industry communities have dedicated much attention to the examination and improvement of

mechanical crane stabilization systems, construction of new components and development of new smart control systems for movement and speed prediction sub-routines. However, less attention has been paid to the full autonomy of crane control operations [2]. New control sub-routines must take into account the full specter of the nature of the container swinging problem [3]. Experienced on-site operators who perform container-handling procedures have years of experience and are ready to respond to continuous changes.

However, due to a lack of knowledge of some crucial elements of control, these operators tend to learn false information. Visual feedback is used to aid in positioning the container below the quay crane. Therefore, it is necessary to control sudden changes in acceleration of the container during its transportation along with the movement of the crane, which results in a change in the high amplitude acceleration. The following section addresses the application of predictive control and neural network (NN) methods and systems.

The associate editor coordinating the review of this manuscript and approving it for publication was Xiaosong Hu¹.

II. LITERATURE REVIEW

A. RECENT ADVANCEMENTS IN CRANE SPREADER AND CARGO STABILIZATION

Recent advances in artificial intelligence, AI machine learning [4], [5], and deep learning [6] have presented new opportunities for use in the industry to solve complex control and scheduling problems. Many engineering problems from the past can now be solved using advanced knowledge extraction methods and big data (BD) analytics tools.

Many academic authors rely solely on the theoretical achievements in the relevant field, while others present strong practical applications in the area of transportation, dealing with delay optimization and various pattern predictions [7]–[11].

We analyzed recent methods for compensating the sway of containers during movement [12] (from ship to shore and shore to ship via quay cranes) and minimizing the overall transportation process [13]. We examined some general methodologies, including the use of key on-site safety and security regulations. The theoretical part of the presented model was based on research ideas from the following authors. Zhang *et al.* [14] developed a model-independent control method, called proportional-derivative sliding mode control, for 3D overhead crane systems to achieve simultaneous trolley positioning and payload swing suppression for quay cranes. Golovin and Palis [15] presented a robust control-based approach for active damping of elastic structural vibrations in gantry cranes. Yongming *et al.* [16] analyzed the influence of vertical deformation in cranes on anti-sway control; they created a novel three-mass three-degree-of-freedom elastic dynamic model of the trolley system to solve the sway problem. Ileš *et al.* [17] presented an asymptotically stabilizing sequential distributed model predictive control (MPC) of a 3D tower crane. Abdullahi *et al.* [18] proposed a new online adaptive output-based command shaping (AOCS) technique for effective payload sway reduction in an overhead crane. Smoczek and Szpytko [19] developed a new evolutionary-based algorithm for a fuzzy logic-based data-driven predictive model of time between failures (TBF) for an adaptive crane control system. Finally, Maghsoudi *et al.* [20] presented an improved unity magnitude zero vibration (UMZV) shaper for payload sway reduction of an underactuated 3D overhead crane with hoisting effects.

B. RECENT ADVANCEMENTS IN CRANE PREDICTIVE CONTROL

Authors Nelson and Johnson [21] developed two model predictive control approaches for optimizing microgrid dispatch. Yang *et al.* [22] proposed a model predictive control system with adaptive machine-learning-based building models for building automation and control applications. Zeng *et al.* [23] aimed to increase the control performance of a selective catalytic reduction (SCR) denitrification system through modeling and disturbance rejection. Beckenbach *et al.* [24] analyzed model-based predictive controllers used to manage control tasks with constraints on

the state. Bünning *et al.* [25] developed a model predictive control method for room temperature control in buildings. Li *et al.* [26] explored a hierarchical model predictive control-based energy management strategy for fuel cell hybrid construction vehicles. Liu *et al.* [27] presented a novel finite control-set model predictive control (FCS-MPC) strategy for solving the well-known challenges in predictive control regulated NNPC. De León Puig *et al.* [28] proposed a simple adaptive-predictive control scheme for a DC-DC buck converter. Hu *et al.* [29] developed generalized predictive control (GPC) to suppress the effect of time-varying delay and parameter identification error during robot-assisted cardiovascular surgery. Wang *et al.* [30] attempted to optimize control performance of the mean value model of a fuel-powered aircraft engine; the authors designed an adaptive fuzzy radial basis function (RBF) neural network to perform predictive air-fuel ratio control to optimize performance and reduce exhaust emissions in fuel-powered unmanned aerial vehicles (UAVs). Maraoui and Bouzrara [31] proposed a distributed model predictive control based on a game theory framework for nonlinear systems with nonlinearly coupled dynamics. Oyama and Durand [32] developed economic model predictive control (EMPC) which integrates process control and economic optimization and can potentially allow time-varying operating policies to maximize economic performance. Yin *et al.* [33] presented a data-driven multi-objective predictive control approach to increase power production and reduce fatigue loads in wind farms using evolutionary optimization. Shi *et al.* [34] analyzed the autonomous vehicle trajectory planning methods and constructed an adaptive model predictive control (AMPC) trajectory tracking system which considers disturbances in the path curvature. Gao *et al.* [35] proposed a data-driven predictive control strategy for a nonlinear system, tested on a continuous stirred tank heater (CSTH) benchmark. Mazar and Rezaiezhadeh [36] employed a model predictive controller (MPC) to minimize boiler activation time. Pozzi *et al.* [37] addressed battery pack management and developed non-linear model predictive control (NMPC). Ramirez *et al.* [38] also developed a fast model-based predictive control (MPC), designed to control active and reactive power exchanged by a grid-connected MMC, providing a fast dynamic response, low current THD, and constant switching frequency. Vallianos *et al.*, [39] presented an experimental and numerical study of predictive control of a hybrid ventilation system in an institutional building, with an emphasis on thermal comfort. Wang and Wang [40] discussed the possibilities to adopt MPC in the automotive industry. Yin *et al.* [41] presented a reliability aware multi-objective predictive control strategy for wind farms based on machine learning and heuristic optimizations.

C. JUSTIFICATION OF THE SELECTED PREDICTION METHOD

A deeper analysis of the scientific publications revealed positive results from the adoption of certain artificial neural network (ANN) training algorithms to solve

prediction problems via time-series forecasting, especially, a modified Levenberg–Marquardt (LM) algorithm by Garoosiha *et al.* [42]. Two authors developed this algorithm independently: Levenberg [43] and Marquardt [44].

Other research teams found LM useful and efficient enough to solve complex tasks in time-constrained situations [45]. Billah *et al.* [46] proposed an improved Levenberg–Marquardt (LM) training algorithm for artificial neural networks to predict the possible day-end closing stock price. Keong *et al.* [47] developed an LM back-propagation artificial neural network model to predict floods. Authors Multazam *et al.* [48] discussed new trends and sources of renewable energy and proposed a wind speed prediction backpropagation neural network (BPNN) with the Levenberg–Marquardt algorithm for weight updates. Qiao *et al.* [49] developed an adaptive LM-algorithm-based echo state network (ALM-ESN) for chaotic time-series predictions. Zhang and Behera [50] proposed a predictive model based on recurrent neural networks trained with the LM back-propagation learning algorithm to forecast solar radiation. Mammadli [51] proposed the use of artificial neural networks using the LM optimization algorithm for the prediction of financial time series. Finally, Shi *et al.* [52] proposed an improved recursive Levenberg–Marquardt algorithm (RLM) to more efficiently train multi-layer neural networks and achieve reliable efficiency in engineering tasks.

LM algorithms in combination with advanced neural network architectures can bring positive results to predict the sway of the spreader during movement and minimize the time delays during live control operations using MPC, by converging more often and accelerating training to be quick enough in real scenarios, under real control operations.

D. WORKING HYPOTHESIS

Based on a review of the current trends in AI and sway control, we propose a technological solution capable of solving the problem of container sway caused by lack of experience in on-site crane operators, by developing an MPC-based method to predict spreader speed during unloading operations. In this paper, we present a generic work hypothesis consisting of two statements:

- Despite their adaptability in solving only generic curve-fitting problems and finding only a local minimum, LM algorithms can be used in machinery control operations where this minimum is sufficient to perform transportation operations more efficiently.
- By estimating speed factors and predicting cargo sway scenarios for the predictive control model, LM is more robust and can more efficiently converge [53].

III. DESCRIPTION OF THE STATISTICAL DATA ACQUISITION SYSTEM AND THE DATA ACQUISITION PROCESS

A. DESCRIPTION OF THE EQUIPMENT USED TO COLLECT THE TRAINING DATA

To acquire the necessary statistical data to train the algorithm, we developed a sensory system and applied it to real

trans-shipment operations using quay cranes, spreader systems, AGVs, and trucks [54]. The system's design and experimental background were modeled according to the methods presented by Harrison *et al.* [55].

In the experimental section, a DL1 PRO data logger/analyzer acquires and transfers the data. It uses a three-axis accelerometer (6 g) to detect the movement vector. Accelerometer working parameters: 3-axis work modes with a guaranteed 6 g minimum full scale on all axes, and maximum resolution of 0.005 g. We examined the dynamic characteristics of the containers with different masses during movement and placement on AGVs/trucks. The acceleration data proved to be very interesting and informative for the analytical section. The research team also examined the spreader and its position above the AGVs /trucks during container handling operations.

The movement detection speed was calculated up to 100 times per second due to several technology limitation factors. The data logging accuracy of the experimental hardware system was set to 1 % due to possible irregularities in the electronics. Figure 1 shows the data logger's hardware, and Figure 2 indicates its placement on the spreader during the experiment.

This data logging technology (DL1 PRO data logger) was selected for several key parameters. First, it recorded accurate data references with exact time stamps and three-dimensional positions in space during movement. Second, it possesses sufficient technological compatibilities with other information and communication technologies (ICT). The logger itself has IP50 environmental protection.

The experiment was performed at the Klaipeda port container terminal – LKAB “Smelte”. During the data acquisition experiment, the necessary equipment was mounted on the spreader of the quay crane (Fig. 2). The quay crane performed container transportation procedures from the ship on top of the AGV (Ship-to-Shore operations). During the spreader's movements, the acceleration data from the accelerometer were collected by the system and stored on an SD card. The container and other statistical information were collected, including the mass of the container and the operators who controlled the movements of the spreader. The entire data acquisition process took nine hours to complete due to battery usage limitations. This data was used for the present research (in total, 200 separate operations were recorded).

B. DESCRIPTION OF THE ACQUIRED DATA

Figure 3 plots measured data from the experimental case study of a shipping container unloading procedure performed by a quay crane at the Klaipeda container port. Each measurement taken during the case studies had its own statistical and operational deviations and technological irregularities, mainly due to the strict rules presented in the operations manual for crane operators. Each “best control choice” scenario was performed without operational problems. Each container varied in mass, although deviations from the 20,000 kg lifting

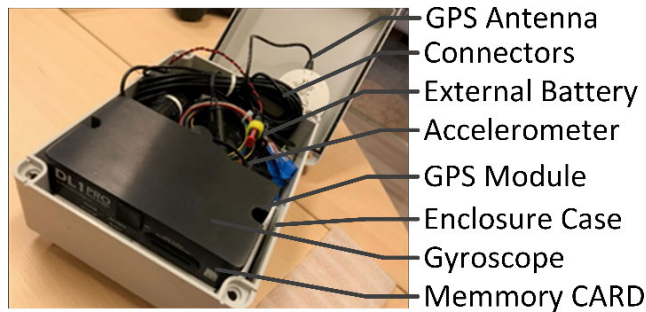


FIGURE 1. DL-1 PRO Datalogger with GPS antenna (the special protective case was designed to withstand a harsh physical environment).



FIGURE 2. Placement of the data acquisition sensory hardware on the quay crane spreader.

operational standard were minimal; it did not affect the quality of the measurements. Figure 4 depicts key stages during transportation/unloading:

- Container raising with hooking
- Vertical raising of the container
- Bias raising of the container
- Horizontal transportation of container
- Bias lowering of the container
- Vertical lowering of the container
- Container placement on the transport means (truck or AGV)

Figure 3 presents the sway speed of the spreader and the container. This information is very important because higher values correlate with the actual speed of the cargo during transportation and ship unloading at a designated port. The data indicate that the overall transportation process is

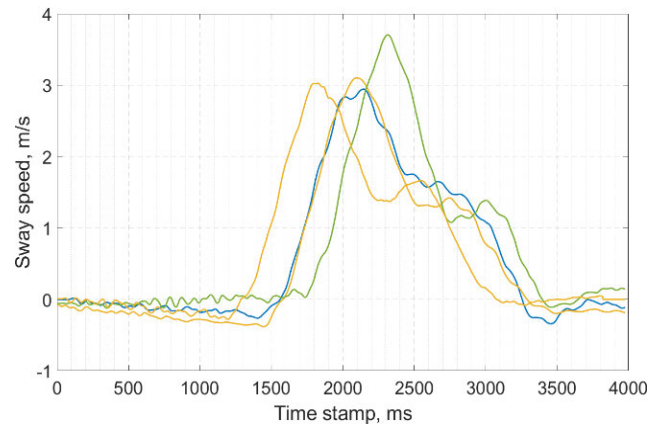


FIGURE 3. Comparison of four cases with detected spreader speed across the X-axis during container transportation from the ship to the AGV.

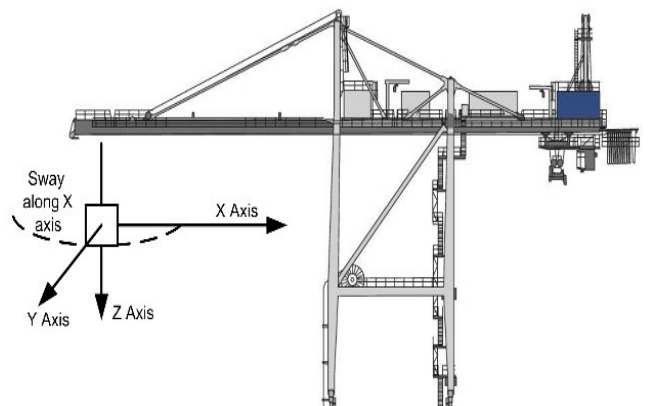


FIGURE 4. Quay crane with spreader movement along three axes.

prolonged due to compensation for sway, thereby creating time delays. Figure 4 depicts quay crane cargo transportation along all axes, the X-axis used for prediction priority due to high sway speeds.

The literature highlights the efficiency of several algorithms used to train neural networks also used in various predictive control scenarios, i.e. variable learning rate backpropagation, scaled conjugate gradient, recursive prediction error methods, and the Levenberg–Marquardt methods. We discuss these algorithms in the following sections and apply them to predict the speed of the spreader along the X-axis using the MLP network structure. To set the input values, we collected data from ten statistically similar procedures using containers of similar mass and the same crane operator. In the modeling phase, we assume that all containers are transported from a single point in space (from the ship), without deviations in their actual placement from each other. In practice, planning is performed with a delay in mind, thus minimizing the efficiency of the terminal [56].

Most operations are also synchronized with the on-site operator's actions for truck and AGV secure movements and CO₂ regulations [57]. Such delays occur daily, and we aim to demonstrate the problem to the academic environment, to the engineers working in this field, and to show the capabilities of new AI prediction methods to solve the possible sway control problems on-site.

Jakovlev *et al.* [58] presented the initial results, which suggested the following:

- Quay crane operators did not maintain uniform horizontal movement speed of the container. The ladder shape presented in Figure 3 indicates the actual decrease in speed.
- Operators initiated sudden control movements of the joystick to stop the container transportation process for short periods.
- Operators initiated corrections to movements and thereby prolonged the container transportation process.
- Lack of experience among operators and low efficiency in the technological synchronization and planning methods for quay cranes, trucks and AGVs led to additional unnecessary oscillations of the cargo, up to the final seventh stage of the transportation [59].
- Because the maximum speed of the spreader is regulated by ISO operational standards, each container was transported with an average of 8.1 seconds delay for the entire period of measurement, the average container transportation speed being 40.4 seconds. According to the operational manual, the working efficiency of these procedures achieved a mere 80 %.
- Each quay crane is limited only by the human factor, therefore prompting new advancements in the relevant area of engineering [60].

It is worth mentioning that the experimental statistical data which describes the underlying network and the sway process throughout its operating range was assigned a suitable sampling frequency in advance, while also eliminating errors.

IV. METHODOLOGY FOR THE PREDICTION MODEL

A. INTRODUCTION OF THE MODEL PREDICTIVE CONTROL (MPC) STRATEGY

For the spreader sway control strategy, we propose the application of an MPC which uses an internal system model to make single-step predictions of the system behavior and compute the container sway over a predefined prediction period, taking into account the operational constraints of the crane. MPC can adequately measure the dynamics of energy consumption devices (motors) and the characteristics of the mechanical components used to move the spreader. New measurements of the system and new predictions are added continuously to the system.

Figure 5 schematically illustrates the main components of centralized model predictive control (CMPC), detailing the optimization criteria for the model in Figure 6.

MPC is a multivariable control algorithm which uses:

- An internal dynamic model of the spreader control process
- A history of past spreader movements (speed values)
- Optimization criteria and the function J , which collaborate over the receding prediction horizon and apply the best AI functions and methods.

General MPCs are based on iterative, finite-horizon optimization models. In the current state, at time t_n , the spreader

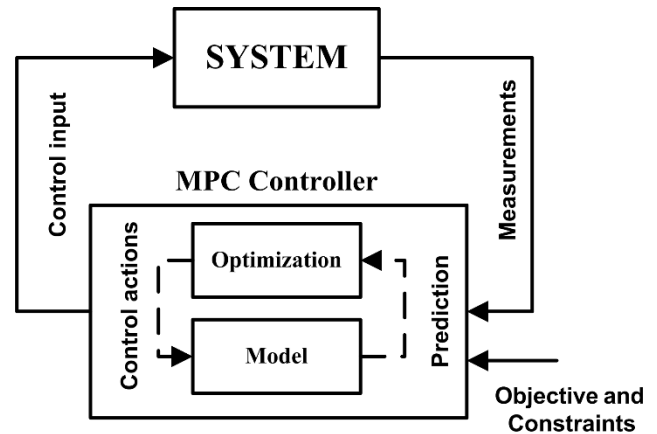


FIGURE 5. Description of the MPC control strategy for the quay crane (system) to detect the speed of the spreader along the X-axis during container transportation from the ship to AGV and to predict the optimal speed for this procedure with time steps t_{k+1} [61].

state (speed) is sampled and a cost-minimizing control strategy is computed (via a numerical minimization algorithm with the optimization block shown in Fig. 5 and Equations 1–3) for a relatively short time horizon in the future for the sampling period T . Specifically, an AI enriched prediction strategy calculation is used to explore spreader speed deviations which emanate from the control current state and find a cost-minimizing control strategy until time for computational period T_c . After the spreader speed control strategy is applied, the spreader speed is sampled again and the calculations are repeated, yielding a new control and new predicted speed. The prediction horizon is continuously shifted forward, and for this reason, MPC is also called Receding Horizon Control [62]. Although this approach is not optimal, in practice it has given very good results [63].

The defined single controller determines the system's inputs. First, at each control step, the CMPC controller measures the current state of the quay crane control system (measures the speed of the spreader) and determines which value control inputs (speed control indicators) to provide to the system using pre-defined numerical optimization models. The model consists of prediction algorithms based on a neural network structure, defined in the following section.

Prediction values (desired speed of the spreader) are linked to the objective function to minimize the overall transportation time of the cargo by the spreader. These optimum values determine the actions which provide the best-predicted performance according to a given objective function $\min J$:

$$\min J(v_T, T) = \sum_{T=1}^{T=n} \frac{S_T}{v_T}, \quad (1)$$

where J is the total minimized transportation time, T is the desired period of the control procedure to take effect (for each prediction step t_{k+1}), n is the number of periods in a transportation process from the ship to the AGV, S is the transportation distance, and v is the transportation speed (obtained by the system from the proposed data acquisition unit). Therefore, the effectiveness of the MPC can be described

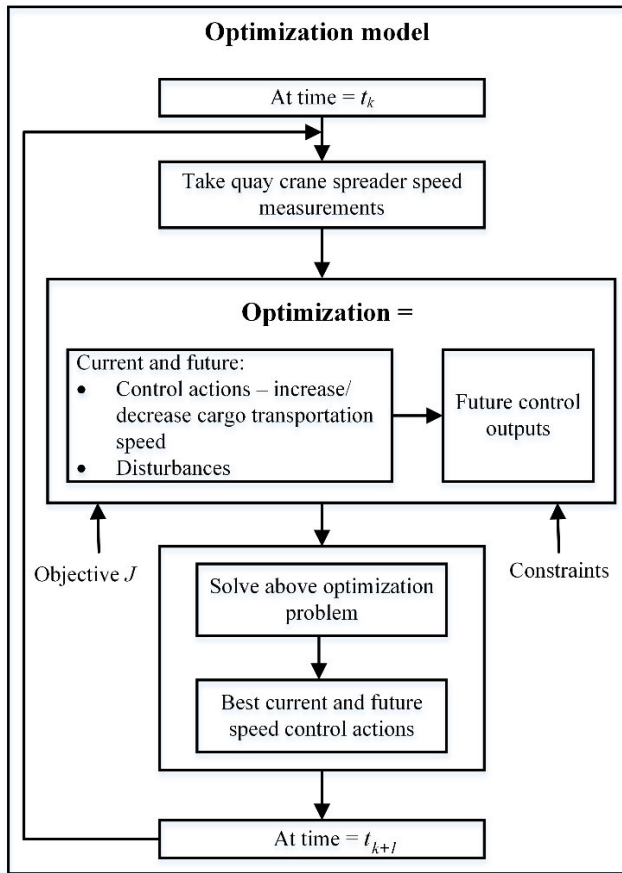


FIGURE 6. Schematic of the MPC Controller optimization algorithm with the optimization objective for the control action, i.e., to increase/decrease the cargo transportation speed.

as (2) and (3):

$$\min \text{MPC}(T, T_c) = (\min J, \min C), \quad (2)$$

$$\min C(T_c) = \sum_{T=1}^{T=n} C_{T_c}, \quad (3)$$

where T_c is the computation period for each new prediction.

This strategy includes the control variables determined for the first prediction step applied to the system, after which the cycle repeats. The goal of this control strategy is to determine the optimal control values so that the spreader stabilization time delay and energy consumption costs are minimized. Hence, the predictive control problem is stated as determining the input values so that the control objectives are achieved optimally while satisfying the overall mechanical and electrical quay crane control system constraints. The proposed MPC solution does not have real-time properties. Delays occurring due to the computational times for each period T decrease the real-time properties, i.e., an increase in the number of periods increases the overall computational time for the entire operation; however, it can decrease the transportation time for each container.

The heart of the controller is a model $M(\mathfrak{Z})$, parameterized by a data set $\mathfrak{Z}$ (consisting of time-series data samples for spreader speed momentum values z_k – input data samples for the neural network for each input node. These are vectors

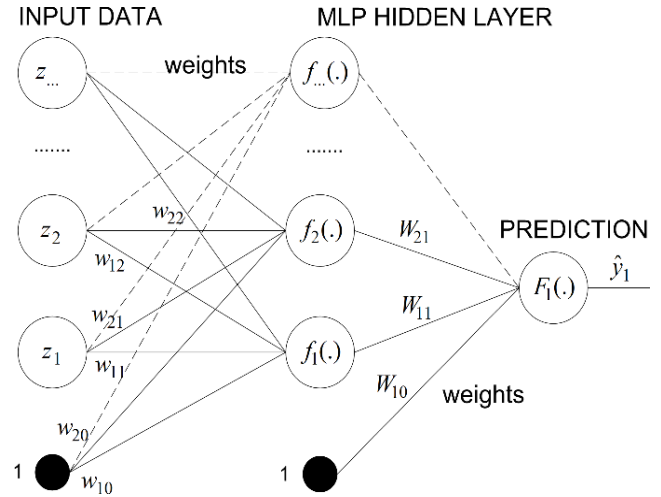


FIGURE 7. Schematic of the ANN MLP structure used in this study.

of the appropriate dimensions used to predict the movement speed of the spreader. Here, k is the number of desired input nodes. Optimization is subject to the constraints of the controller variables (CVs). The effectiveness of the MPC system in these control tasks is from the advantages of the implicit closed-loop control law. Only the first of the set of control values, i.e., $\mathfrak{Z}$, is transmitted to the prediction model, after which the complete optimization and prediction procedure is repeated using the current speed value output, thereby improving the results at each iteration, after each period T .

B. MODEL STRUCTURE SELECTION

The aim of this study is to analyze and discuss the performance of an artificial neural network, i.e., a multi-layer perceptron (MLP), in the prediction and estimation of container sway during a quay crane unloading process. The modeling problem was defined as a time series forecasting function approximation problem. MLP can model complex functional relationships and approximate any complex nonlinear function.

To test the functionality and efficiency of the LM algorithm, we compared it to several other conventional algorithms:

- Recursive prediction error method
- Scaled conjugate gradient
- Variable learning rate backpropagation

The network inputs were the spreader speeds from the presented case studies. At each new phase, the network is trained using the previous “best-case” experience from the data set $\mathfrak{Z}$, adding the new node z_n , upgrading the data set θ and eliminating the “worst-case” scenarios, while keeping the number of parameters and the size of the data set θ constant. We designed a fully connected two-layer feedforward MLP-network containing four inputs for each speed value, along with a varying number of hidden units, and a single output unit, for the prediction of X-axis spreader sway speed (Fig. 7).

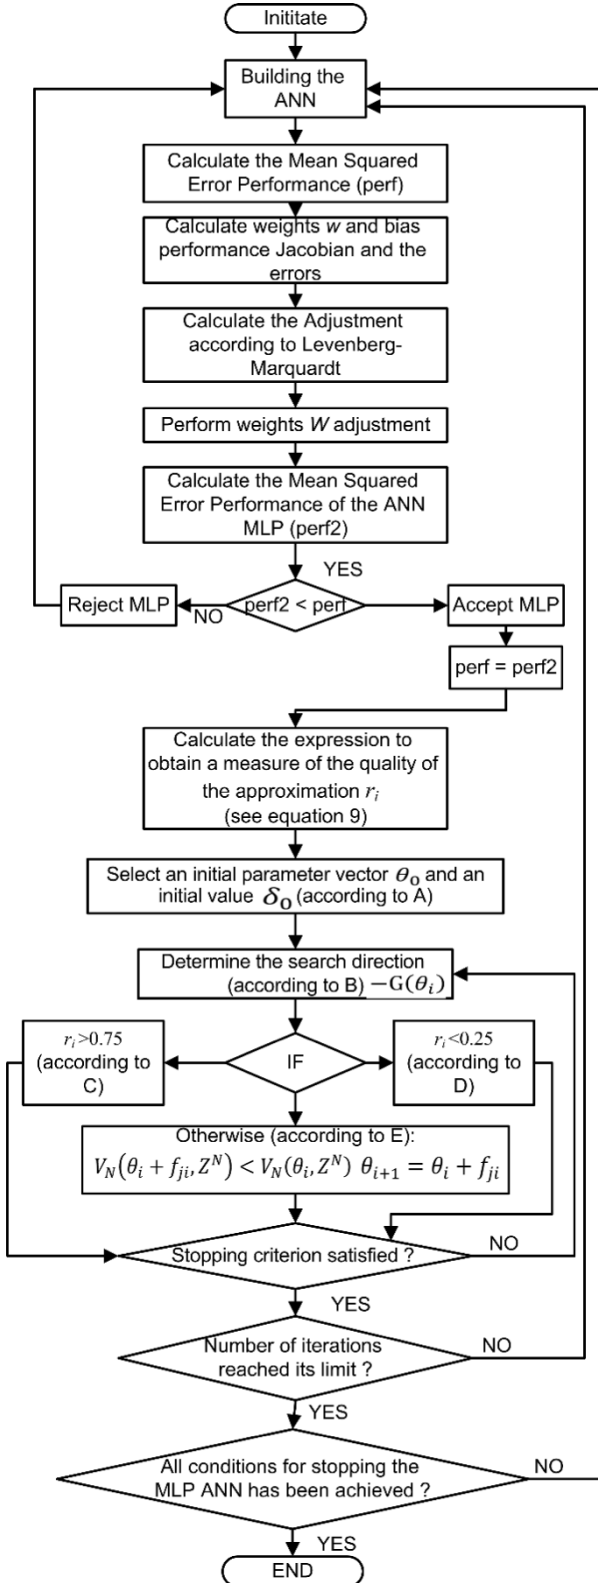


FIGURE 8. Implementation of the Levenberg–Marquardt algorithm in NNSYSID.

The network output is the predicted speed of the spreader according to the crane operator's control actions. ANN training data Z^N consists of inputs to the network $u(t)$ and

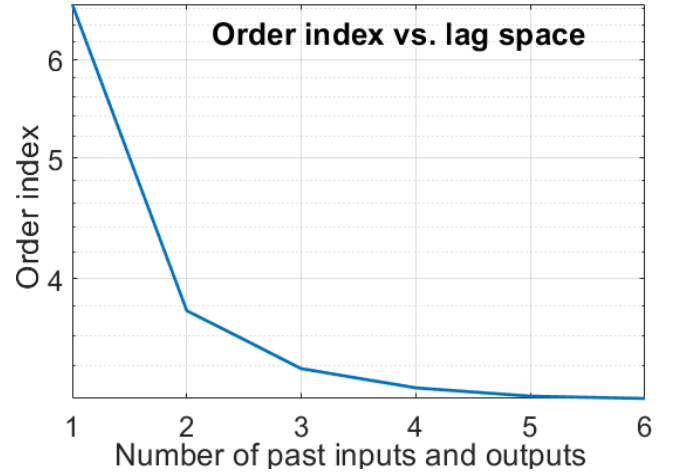


FIGURE 9. Investigated indices for system orders from 1 to 6.

corresponding desired outputs $y(t)$:

$$Z^N = \{[u(t), y(t)] | i = 1 \dots N\}. \quad (4)$$

The defined MLP network consists of a hidden layer and hyperbolic tangent sigmoid activation functions (f, F):

$$\hat{y}_i(w, W) = F_i \left(\sum_j^q W_{ij} f_j \left(\sum_{l=1}^2 w_{jl} z_l + w_{j0} \right) + W_{i0} \right). \quad (5)$$

In this case, the MLP hidden layer $f(\cdot)$ for each hidden neuron (z_j, w_j) is presented as:

$$f_j(z_j, w_j) = \frac{2}{1 + e^{-2 \sum_{j=1}^2 z_j \cdot w_{ji} + w_{j0}}} - 1. \quad (6)$$

The output of the neural network with n nodes in a hidden layer is defined as:

$$y_i(y_{ij}, W_{ij}) = F \left(\sum_{i=1}^n y_{ij} \cdot W_{ij} + W_{0j} \right). \quad (7)$$

The weights (specified by the vector θ and by the matrices w and W) are the adjustable parameters of the MLP network determined through the neural network training procedure. The objective of the training is then to determine a mapping from the set of training data to the set of possible weights:

$$Z^N \rightarrow \hat{\theta}. \quad (8)$$

MLP produces the predictions $\hat{y}_i(t)$. MLP uses the prediction error approach, which measures closeness in terms of a mean square error criterion:

$$V_N(\theta, Z^N) = \frac{1}{2 \cdot N} \sum_{i=1}^N \begin{bmatrix} y_i - \hat{y}_{i|\theta} \\ y_i - \hat{y}_{i|\theta} \end{bmatrix}^T. \quad (9)$$

The weights for the predictions are:

$$\hat{\theta} = \arg \min_{\theta} V_N(\theta, Z^N). \quad (10)$$

By an iterative minimization scheme:

$$\theta_{i+1} = \theta_i + \mu_i \cdot f_i, \quad (11)$$

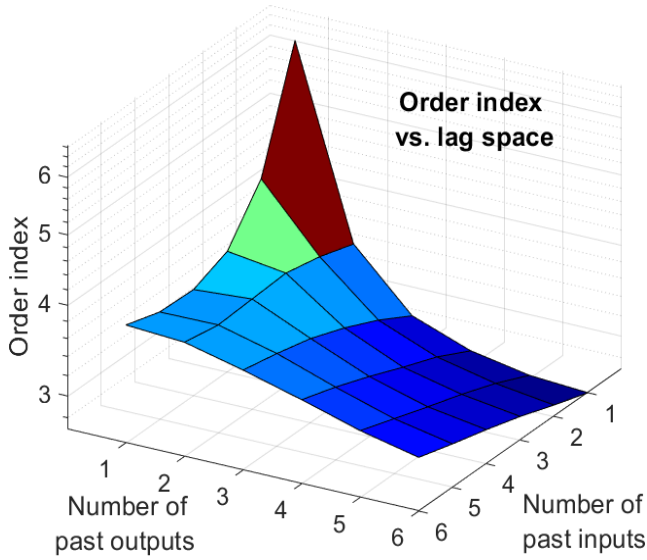


FIGURE 10. Investigated indices for system orders from 1 to 6 for past inputs and past outputs.

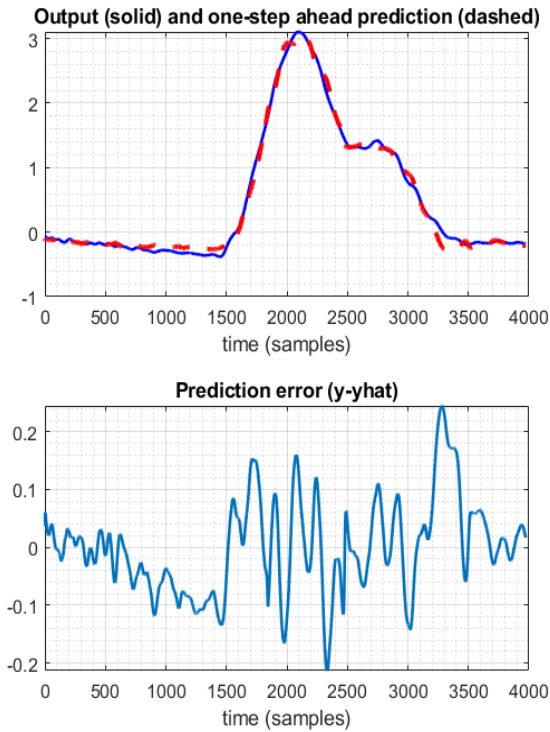


FIGURE 11. One-step ahead prediction for an NN with 10 hidden neurons and a 3rd order model using the LM algorithm.

where θ_i specifies the current iterate, and f_i is the search direction with the step size μ_i .

The selected MLP neural network structure and mathematical definition is the most-often considered choice for prediction problems [64] which use only one hidden layer. In particular, we selected the LM version of Baptista and Morgado-dias [53] for training since it proved effective in solving similar tasks. The difference between the Marquardt [44] and the current iteration of LM is in the following adjustments by Fletcher [65]. The size of the elements

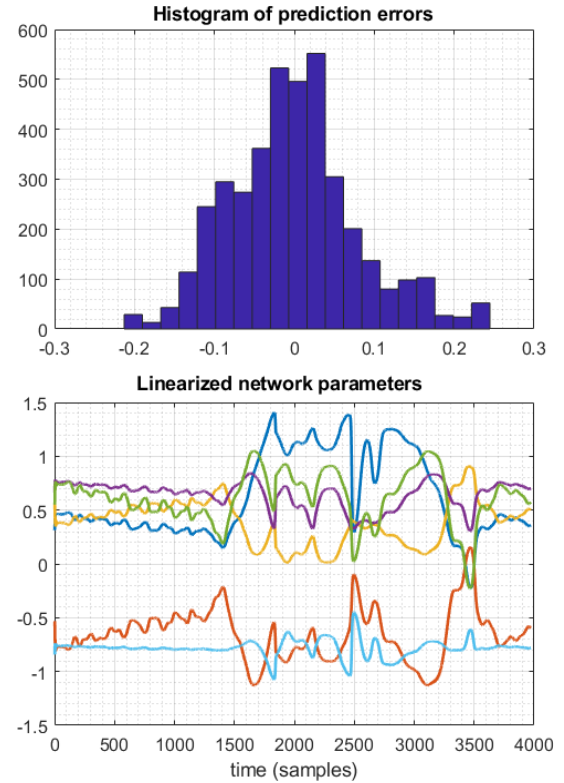


FIGURE 12. Prediction errors for an NN with 10 hidden neurons and a 3rd order model using the LM algorithm.

of the diagonal matrix added to the Gauss–Newton Hessian is according to the size of the ratio between actual decrease and predicted decrease:

$$r_i = \frac{V_N(\theta_i, Z^N) - V_N(\theta_i + f_{ji}, Z^N)}{V_N(\theta_i, Z^N) - L_i(\theta_i + f_{ji})}, \quad (12)$$

$$L(\theta_i + f_{ji}) = V_N(\theta_i, Z^N) + f^T B(\theta_i) + \frac{1}{2} f^T B(\theta_i) f_{ji}, \quad (13)$$

where B denotes the gradient of the criterion concerning the weights, and R is the so-called Gauss–Newton approximation to the Hessian. The following NNSYSID algorithm was applied to the LM (Fig. 8):

- A. Select an initial parameter vector θ_0 and an initial value δ_0 ;
- B. Determine the search direction from $[R(\theta_i + \delta_i \cdot I)] \cdot f_{ji} = -G(\theta_i)$, where I is a unit matrix;
- C. If the predicted decrease is close to the actual decrease, let the search direction approach the Gauss–Newton search direction while increasing step size, $r_i > 0.75 \rightarrow \delta_i = \delta_i/2$;
- D. If a predicted decrease is far from the actual decrease, let the search direction approach the gradient direction while decreasing step size, $r_i < 0.25 \rightarrow \delta_i = 2 \cdot \delta_i$;
- E. If $V_N(\theta_i + f_{ji}, Z^N) < V_N(\theta_i, Z^N)$, then $\theta_{i+1} = \theta_i + f_{ji}$ as a new iterate and let $\delta_{i+1} = \delta_i$, $i = i + 1$.
- F. If the stopping criterion is not satisfied, go to 2).

The weights are adjustable, and they are updated through network training. The objective of the training is then to

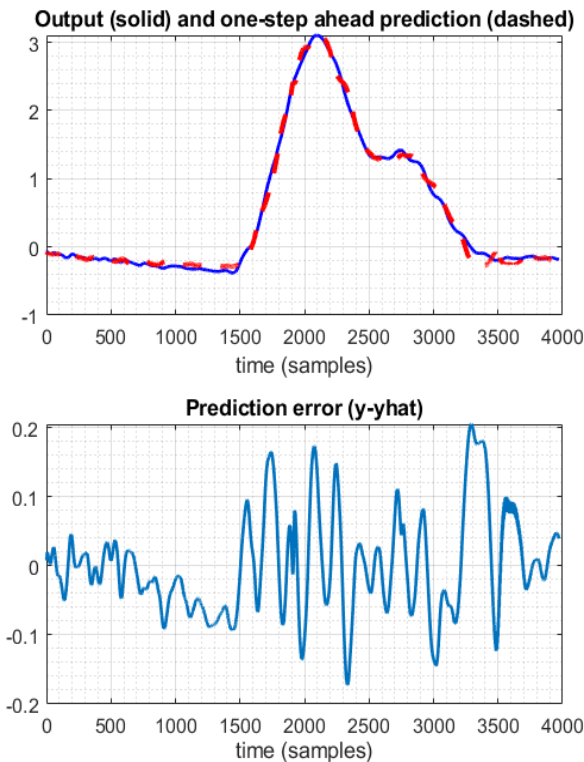


FIGURE 13. One-step ahead prediction for an NN with 10 hidden neurons and a 3rd order model using the recursive prediction error method.

determine a mapping from the set of training data to the set of possible weights.

Many methods are available to select the number of nodes in a hidden layer [66], however no general rule exists which meets every case of neural network design. Therefore, we designed several NN structures: 5, 10, 15, and 20 hidden neurons in each case. We defined the normal distribution for random initial weights for each trial and partitioned the training and test data. Training was performed on the first 70 % of the sequence and the test on the final 30 %. Each algorithm was programmed to train until the squared error threshold was less than 0.005.

V. COMPUTATIONAL RESULTS

The neural network was trained using MATLAB software. First, the training set was scaled to a zero mean and a variance of one, and then the test set was scaled with the same constants. Next, we addressed the problem of finding the order of the system (Fig. 9).

It is difficult to conclude anything certain from this figure. The added measurement noise in all four data samples corrupted the measurements. Figure 10 charts the order index correlation with past inputs and outputs.

We can assume that the system can be modeled by a 3rd order model since the slope of the curve decreases for model orders ≥ 3 . Figures 11 to 18 indicate the efficiency of the training algorithms for one-step-ahead predictions.

A comparison of the plots for the training and test sets for all four algorithms was satisfactory. The computational

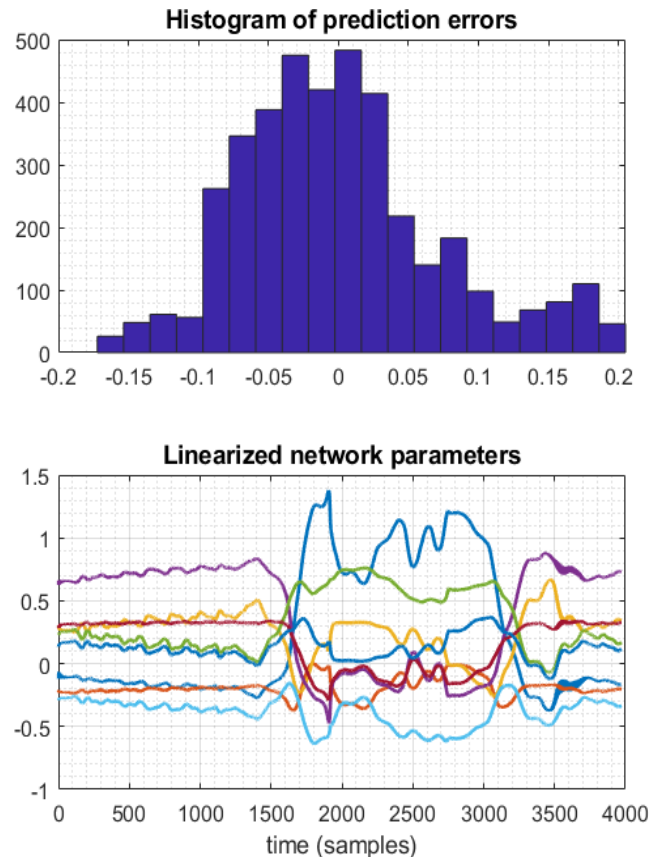


FIGURE 14. Prediction errors for an NN with 10 hidden neurons and a 3rd order model using the recursive prediction error method.

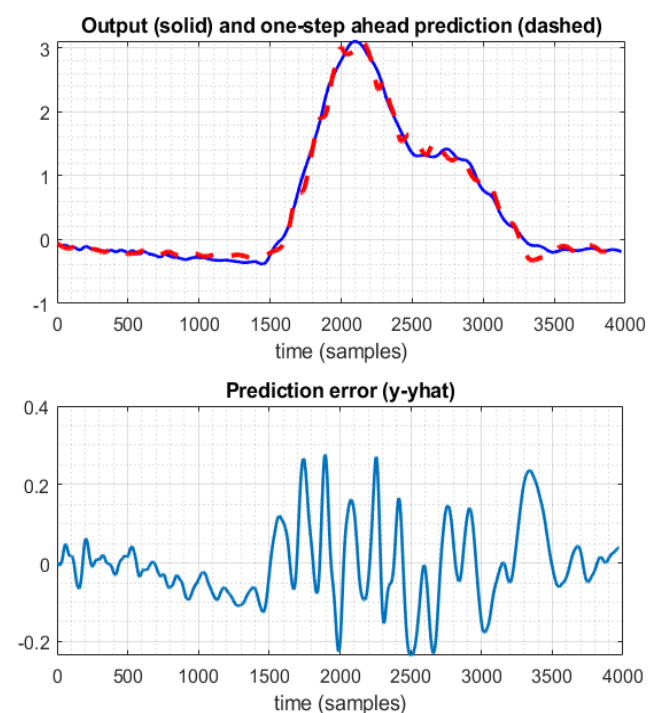


FIGURE 15. One-step ahead prediction for an NN with 10 hidden neurons and 3rd order model using scaled conjugate gradient.

results suggest that the networks do not overfit the data in each case. Therefore, we conclude that the selected MLP

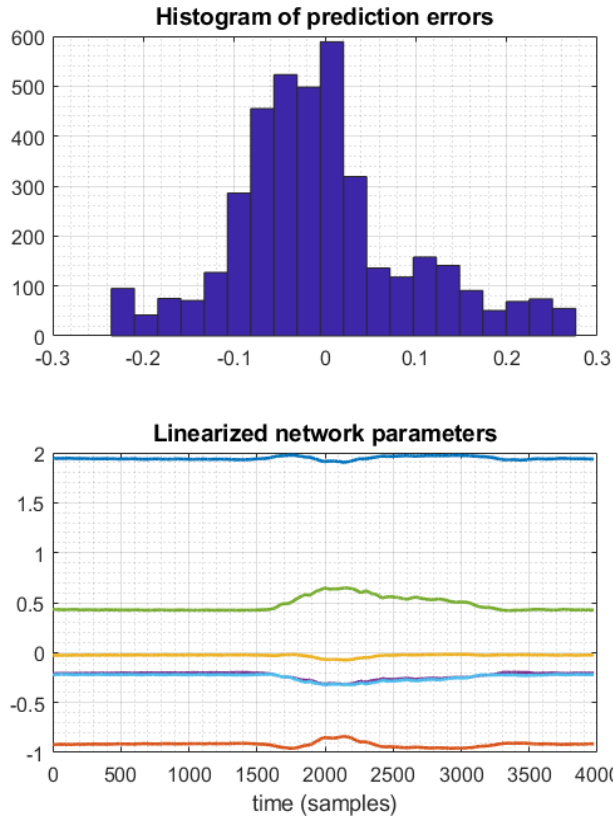


FIGURE 16. Prediction errors for an NN with 10 hidden neurons and 3rd order model using scaled conjugate gradient.

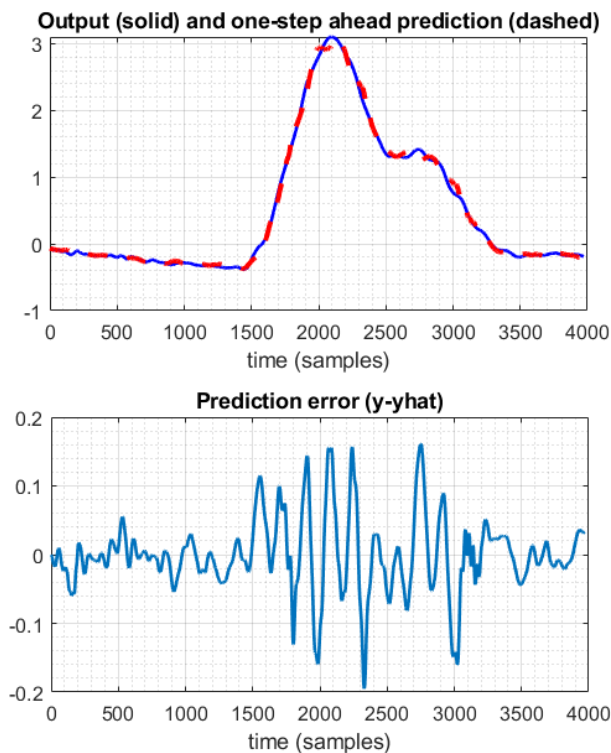


FIGURE 17. One-step ahead prediction for an NN with 10 hidden neurons and 3rd order model using variable learning rate backpropagation.

model structure contains optimum weights for each algorithm. After training the MLP neural network with LM

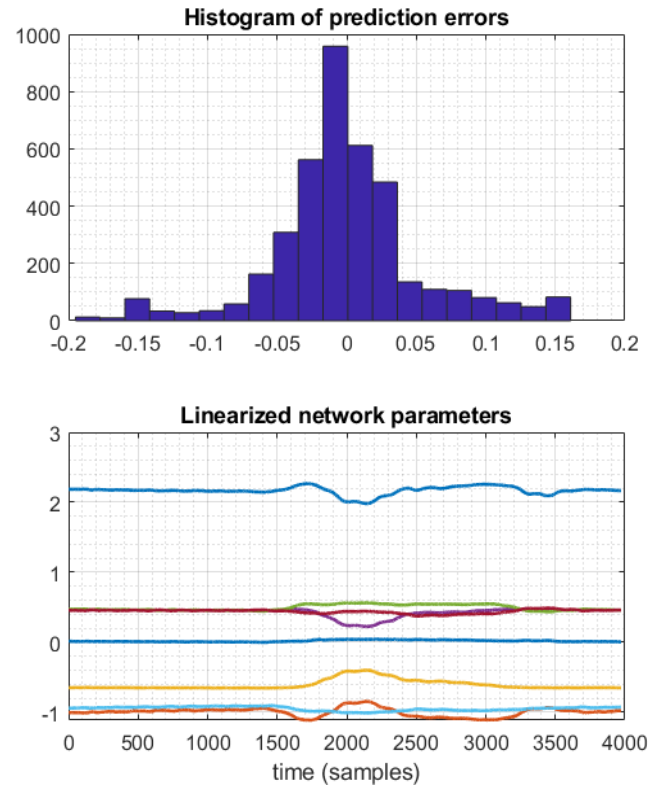


FIGURE 18. Prediction errors for an NN with 10 hidden neurons and 3rd order model using variable learning rate backpropagation.

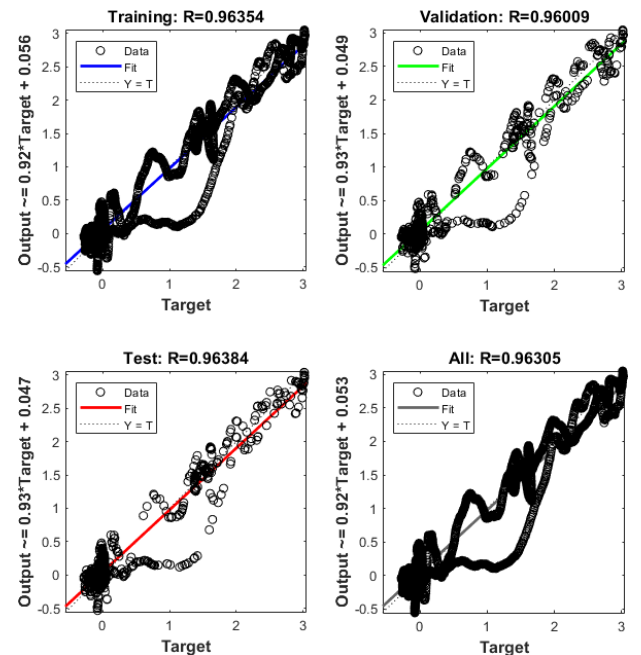


FIGURE 19. Evaluation of the correlation between target values and neural network outputs for the LM algorithm.

and other methods, we evaluated a correlation between the target values and neural network outputs. We can observe in Figure 19 that the correlation is very strong (overall correlation coefficient $R = 0.96$) for the LM method with 10 hidden neurons in the NN, which indicates that the approximation of the correction function $f(\cdot)$ was accurate for LM.

TABLE 1. Correlation results.

NN structure/number of hidden neurons	Algorithm	Correlation value, R
5	recursive prediction error	0.84853
10	recursive prediction error	0.95555
15	recursive prediction error	0.94693
20	recursive prediction error	0.96001
5	scaled conjugate gradient	0.88822
10	scaled conjugate gradient	0.93661
15	scaled conjugate gradient	0.93228
20	scaled conjugate gradient	0.96213
5	variable learning rate backpropagation	0.79656
10	variable learning rate backpropagation	0.94569
15	variable learning rate backpropagation	0.93999
20	variable learning rate backpropagation	0.93687

Table 1 shows the obtained correlation results for the other previously presented algorithms.

Each of the learning methods is capable of providing adequate results while estimating the prediction errors. During the experimental phase, other NN structures consisting of 5 to 20 hidden neurons were estimated. Network structures with only 10 hidden neurons proved more accurate in predictions compared to other network structures with a higher or a lower number of hidden neurons. The LM method showed promising results with a 3rd order model, with the correlation coefficient varying from 0.81121 to 0.96384; these were best achieved results of all the methods.

VI. CONCLUSION

In this paper, we analyzed several different AI approaches to solve the time-series prediction problem for heavy machinery control operations. As mentioned in the introduction, the paper presents the first stage of the development of a complex system for the Klaipeda Container Terminal quay cranes, using MPC methodology and AI for spreader sway predictive control. Two statements were introduced, and the following results were achieved:

- Despite only being used to find the local minimum in a curve-fitting problem, LM algorithms can certainly be applied in MPC systems. The variable learning rate backpropagation algorithm also showed promising results, with slightly better prediction errors than LM, on average.
- LM proved to be more efficient in terms of computational speed and adaptability to the desired curve-fitting level according to the estimated prediction errors.
- We agree with the results of Baptista and Morgado-dias [53], who concluded that LM is more robust and converges more efficiently than the variable learning rate backpropagation, scaled conjugate gradient, and recursive prediction error methods using a perceptron neural network and 10 hidden neurons during experimental estimation.

We also would like to highlight that in such complex systems, different prediction models will typically have several local minima and that there is no way to determine whether a given minimum is global.

Each computational iteration can perform better than the previous one. In the current scenario, we achieved better results for the LM, but we encourage other researchers to analyze the neural network model structures of other scenarios and to compare the results. We still recommended always training the network several times assuming different initial weights despite the smoothing effect of regularization on the criterion to eliminate a number of the minima.

VII. DISCUSSION

The authors plan to continue this research and develop control units for the Klaipeda seaport container terminal LKAB “Smelte” quay and its stacking cranes. Future research will highlight the effect of the computational time of each new method on the efficiency of the MPC via proposed optimization criteria, using other methods and neural network structures. The paper showed the initial results of the LM algorithm’s prediction accuracy in MPC systems for quay crane control.

After the experimental studies, additional results will be presented from the developed electronics units using the research results of the supporting project. The authors concur that if more samples and more nodes are selected for neural network training, it would increase the computational load (also discussed in Section II (Part A)) and allow an increase in the prediction accuracy for each control period.

ACKNOWLEDGMENT

The authors would like to thank Klaipeda University’s other main project members, Mindaugas Jusis, Dr. Pavol Partila, and Dr. Jaromir Tovarek, for their deep insights and relevant contribution to the work.

DECLARATION OF CONFLICTING INTERESTS

The authors declared no potential conflicts of interest concerning the research, authorship, and/or publication of this article.

REFERENCES


- [1] S.-L. Chao and Y.-J. Lin, “Evaluating advanced quay cranes in container terminals,” *Transp. Res. E, Logistics Transp. Rev.*, vol. 47, no. 4, pp. 432–445, Jul. 2011, doi: [10.1016/j.tre.2010.12.002](https://doi.org/10.1016/j.tre.2010.12.002).
- [2] T. Eglynas, M. Jusis, S. Jakovlev, A. Senulis, P. Partila, and S. Gudas, “Research of quay crane control algorithm with embedded sway control sub-routine,” in *Proc. 27th Telecommun. Forum (TELFOR)*, Nov. 2019, pp. 17–20, doi: [10.1109/TELFOR48224.2019.8971115](https://doi.org/10.1109/TELFOR48224.2019.8971115).
- [3] H. Sano, K. Ohishi, T. Kaneko, and H. Mine, “Anti-sway crane control based on dual state observer with sensor-delay correction,” in *Proc. 11th IEEE Int. Workshop Adv. Motion Control (AMC)*, Mar. 2010, pp. 679–684, doi: [10.1109/AMC.2010.5464050](https://doi.org/10.1109/AMC.2010.5464050).
- [4] P. Zhang, H.-N. Wu, R.-P. Chen, and T. H. T. Chan, “Hybrid meta-heuristic and machine learning algorithms for tunneling-induced settlement prediction: A comparative study,” *Tunnelling Underground Space Technol.*, vol. 99, May 2020, Art. no. 103383, doi: [10.1016/j.tust.2020.103383](https://doi.org/10.1016/j.tust.2020.103383).
- [5] H. Keshavarzi, A. Sadeghi-Sefidmazgi, A. Mirzaei, and R. Ravanifard, “Machine learning algorithms, bull genetic information, and imbalanced datasets used in abortion incidence prediction models for Iranian Holstein dairy cattle,” *Preventive Veterinary Med.*, vol. 175, Feb. 2020, Art. no. 104869.
- [6] T. Liu, X. Tang, H. Wang, H. Yu, and X. Hu, “Adaptive hierarchical energy management design for a plug-in hybrid electric vehicle,” *IEEE Trans. Veh. Technol.*, vol. 68, no. 12, pp. 11513–11522, Dec. 2019, doi: [10.1109/TVT.2019.2926733](https://doi.org/10.1109/TVT.2019.2926733).

- [7] S. Xie, X. Hu, S. Qi, X. Tang, K. Lang, Z. Xin, and J. Brighton, "Model predictive energy management for plug-in hybrid electric vehicles considering optimal battery depth of discharge," *Energy*, vol. 173, pp. 667–678, Apr. 2019, doi: [10.1016/j.energy.2019.02.074](https://doi.org/10.1016/j.energy.2019.02.074).
- [8] X. Xu, N. Hu, T. Li, M. Trovati, F. Palmieri, G. Kontonatsios, and A. Castiglione, "Distributed temporal link prediction algorithm based on label propagation," *Future Gener. Comput. Syst.*, vol. 93, pp. 627–636, Apr. 2019, doi: [10.1016/j.future.2018.10.056](https://doi.org/10.1016/j.future.2018.10.056).
- [9] W. Sun and C. Huang, "A carbon price prediction model based on secondary decomposition algorithm and optimized back propagation neural network," *J. Cleaner Prod.*, vol. 243, Jan. 2020, Art. no. 118671, doi: [10.1016/j.jclepro.2019.118671](https://doi.org/10.1016/j.jclepro.2019.118671).
- [10] R. R. Priyadarshini and N. Sivakumar, "Failure prediction, detection & recovery algorithms using MCMC in tree-based network topology to improve coverage and connectivity in 3D-UW environment," *Appl. Acoust.*, vol. 158, Jan. 2020, Art. no. 107053, doi: [10.1016/j.apacoust.2019.107053](https://doi.org/10.1016/j.apacoust.2019.107053).
- [11] S. Li, X. Song, H. Lu, L. Zeng, M. Shi, and F. Liu, "Friend recommendation for cross marketing in online brand community based on intelligent attention allocation link prediction algorithm," *Expert Syst. Appl.*, vol. 139, Jan. 2020, Art. no. 112839, doi: [10.1016/j.eswa.2019.112839](https://doi.org/10.1016/j.eswa.2019.112839).
- [12] A. Trąbka, "Dynamics of telescopic cranes with flexible structural components," *Int. J. Mech. Sci.*, vol. 88, pp. 162–174, Nov. 2014, doi: [10.1016/j.ijmecsci.2014.07.009](https://doi.org/10.1016/j.ijmecsci.2014.07.009).
- [13] A. M. Martín-Soberón, A. Monfort, R. Sapiña, N. Monterde, and D. Calduch, "Automation in port container terminals," *Procedia-Social Behav. Sci.*, vol. 160, pp. 195–204, Dec. 2014, doi: [10.1016/j.sbspro.2014.12.131](https://doi.org/10.1016/j.sbspro.2014.12.131).
- [14] M. Zhang, Y. Zhang, H. Chen, and X. Cheng, "Model-independent PD-SMC method with payload swing suppression for 3D overhead crane systems," *Mech. Syst. Signal Process.*, vol. 129, pp. 381–393, Aug. 2019, doi: [10.1016/j.ymssp.2019.04.046](https://doi.org/10.1016/j.ymssp.2019.04.046).
- [15] I. Golovin and S. Palis, "Robust control for active damping of elastic gantry crane vibrations," *Mech. Syst. Signal Process.*, vol. 121, pp. 264–278, Apr. 2019, doi: [10.1016/j.ymssp.2018.11.005](https://doi.org/10.1016/j.ymssp.2018.11.005).
- [16] B. Yongming, Y. Jiange, X. Xiaolei, W. Lu, and Z. Lishan, "Research on elastic dynamic model of trolley system for anti-sway control system of bridge crane," *Procedia CIRP*, vol. 78, pp. 285–288, Jan. 2018, doi: [10.1016/j.procir.2018.08.325](https://doi.org/10.1016/j.procir.2018.08.325).
- [17] Š. Ileš, J. Matuško, and F. Kolonić, "Sequential distributed predictive control of a 3D tower crane," *Control Eng. Pract.*, vol. 79, pp. 22–35, Oct. 2018, doi: [10.1016/j.conengprac.2018.07.001](https://doi.org/10.1016/j.conengprac.2018.07.001).
- [18] A. M. Abdullahi, Z. Mohamed, H. Selamat, H. R. Pota, M. S. Z. Abidin, F. S. Ismail, and A. Haruna, "Adaptive output-based command shaping for sway control of a 3D overhead crane with payload hoisting and wind disturbance," *Mech. Syst. Signal Process.*, vol. 98, pp. 157–172, Jan. 2018, doi: [10.1016/j.ymssp.2017.04.034](https://doi.org/10.1016/j.ymssp.2017.04.034).
- [19] J. Smoczek and J. Szpytko, "Evolutionary algorithm-based design of a fuzzy TBF predictive model and TSK fuzzy anti-sway crane control system," *Eng. Appl. Artif. Intell.*, vol. 28, pp. 190–200, Feb. 2014, doi: [10.1016/j.engappai.2013.07.013](https://doi.org/10.1016/j.engappai.2013.07.013).
- [20] M. J. Maghsoudi, L. Ramli, S. Sudin, Z. Mohamed, A. R. Husain, and H. Wahid, "Improved unity magnitude input shaping scheme for sway control of an underactuated 3D overhead crane with hoisting," *Mech. Syst. Signal Process.*, vol. 123, pp. 466–482, May 2019, doi: [10.1016/j.ymssp.2018.12.056](https://doi.org/10.1016/j.ymssp.2018.12.056).
- [21] J. R. Nelson and N. G. Johnson, "Model predictive control of microgrids for real-time ancillary service market participation," *Appl. Energy*, vol. 269, Jul. 2020, Art. no. 114963, doi: [10.1016/j.apenergy.2020.114963](https://doi.org/10.1016/j.apenergy.2020.114963).
- [22] S. Yang, M. P. Wan, W. Chen, B. F. Ng, and S. Dubey, "Model predictive control with adaptive machine-learning-based model for building energy efficiency and comfort optimization," *Appl. Energy*, vol. 271, Aug. 2020, Art. no. 115147, doi: [10.1016/j.apenergy.2020.115147](https://doi.org/10.1016/j.apenergy.2020.115147).
- [23] L. Zeng, Y. Li, P. Liao, and S. Wei, "Adaptive disturbance rejection model predictive control and its application in a selective catalytic reduction denitrification system," *Comput. Chem. Eng.*, vol. 140, Sep. 2020, Art. no. 106963, doi: [10.1016/j.compchemeng.2020.106963](https://doi.org/10.1016/j.compchemeng.2020.106963).
- [24] L. Beckenbach, P. Osinenko, and S. Streif, "A Q-learning predictive control scheme with guaranteed stability," *Eur. J. Control.*, vol. 56, pp. 167–178, Nov. 2020, doi: [10.1016/j.ejcon.2020.03.001](https://doi.org/10.1016/j.ejcon.2020.03.001).
- [25] F. Bünnig, B. Huber, P. Heer, A. Aboudonia, and J. Lygeros, "Experimental demonstration of data predictive control for energy optimization and thermal comfort in buildings," *Energy Buildings*, vol. 211, Mar. 2020, Art. no. 109792, doi: [10.1016/j.enbuild.2020.109792](https://doi.org/10.1016/j.enbuild.2020.109792).
- [26] T. Li, H. Liu, H. Wang, and Y. Yao, "Hierarchical predictive control-based economic energy management for fuel cell hybrid construction vehicles," *Energy*, vol. 198, May 2020, Art. no. 117327, doi: [10.1016/j.energy.2020.117327](https://doi.org/10.1016/j.energy.2020.117327).
- [27] X. Liu, L. Qiu, Y. Fang, J. Ma, W. Wu, Z. Peng, and D. Wang, "Lyapunov-based finite control-set model predictive control for nested neutral point-clamped converters without weighting factors," *Int. J. Electr. Power Energy Syst.*, vol. 121, Oct. 2020, Art. no. 106071, doi: [10.1016/j.ijepes.2020.106071](https://doi.org/10.1016/j.ijepes.2020.106071).
- [28] N. I. P. de León Puig, D. Bozalakov, L. Acho, L. Vandevelde, and J. Rodellar, "An adaptive-predictive control scheme with dynamic hysteresis modulation applied to a DC–DC buck converter," *ISA Trans.*, vol. 105, pp. 240–255, Oct. 2020, doi: [10.1016/j.isatra.2020.05.015](https://doi.org/10.1016/j.isatra.2020.05.015).
- [29] Z. Hu, J. Zhang, L. Xie, and G. Cui, "A generalized predictive control for remote cardiovascular surgical systems," *ISA Trans.*, vol. 104, pp. 336–344, Sep. 2020, doi: [10.1016/j.isatra.2020.05.020](https://doi.org/10.1016/j.isatra.2020.05.020).
- [30] Y. Wang, Y. Shi, M. Cai, and W. Xu, "Predictive control of air-fuel ratio in aircraft engine on fuel-powered unmanned aerial vehicle using fuzzy-RBF neural network," *J. Franklin Inst.*, vol. 357, no. 13, pp. 8342–8363, Sep. 2020, doi: [10.1016/j.jfranklin.2020.03.016](https://doi.org/10.1016/j.jfranklin.2020.03.016).
- [31] N. Hajji, S. Maraoui, and K. Bouzara, "Robust distributed nonlinear model predictive control via dual decomposition approach based on game theory," *J. Franklin Inst.*, vol. 357, no. 12, pp. 7680–7695, Aug. 2020, doi: [10.1016/j.jfranklin.2020.05.032](https://doi.org/10.1016/j.jfranklin.2020.05.032).
- [32] H. Oyama and H. Durand, "Interactions between control and process design under economic model predictive control," *J. Process Control*, vol. 92, pp. 1–18, Aug. 2020, doi: [10.1016/j.jprocont.2020.05.009](https://doi.org/10.1016/j.jprocont.2020.05.009).
- [33] X. Yin, W. Zhang, Z. Jiang, and L. Pan, "Data-driven multi-objective predictive control of offshore wind farm based on evolutionary optimization," *Renew. Energy*, vol. 160, pp. 974–986, Nov. 2020, doi: [10.1016/j.renene.2020.05.015](https://doi.org/10.1016/j.renene.2020.05.015).
- [34] J. Shi, D. Sun, D. Qin, M. Hu, Y. Kan, K. Ma, and R. Chen, "Planning the trajectory of an autonomous wheel loader and tracking its trajectory via adaptive model predictive control," *Robot. Auto. Syst.*, vol. 131, Sep. 2020, Art. no. 103570, doi: [10.1016/j.robot.2020.103570](https://doi.org/10.1016/j.robot.2020.103570).
- [35] T. Gao, H. Luo, S. Yin, and O. Kaynak, "A recursive modified partial least square aided data-driven predictive control with application to continuous stirred tank heater," *J. Process Control*, vol. 89, pp. 108–118, May 2020, doi: [10.1016/j.jprocont.2020.03.004](https://doi.org/10.1016/j.jprocont.2020.03.004).
- [36] M. M. Mazar and A. Rezaeizadeh, "Adaptive model predictive climate control of multi-unit buildings using weather forecast data," *J. Building Eng.*, vol. 32, Nov. 2020, Art. no. 101449, doi: [10.1016/j.jobe.2020.101449](https://doi.org/10.1016/j.jobe.2020.101449).
- [37] A. Pozzi, M. Torchio, R. D. Braatz, and D. M. Raimondo, "Optimal charging of an electric vehicle battery pack: A real-time sensitivity-based model predictive control approach," *J. Power Sources*, vol. 461, Jun. 2020, Art. no. 228133, doi: [10.1016/j.jpowsour.2020.228133](https://doi.org/10.1016/j.jpowsour.2020.228133).
- [38] D. Ramirez, M. E. Zarei, M. Gupta, and J. Serrano, "Fast model-based predictive control (FMPC) for grid connected modular multilevel converters (MMC)," *Int. J. Electr. Power Energy Syst.*, vol. 119, Jul. 2020, Art. no. 105951, doi: [10.1016/j.ijepes.2020.105951](https://doi.org/10.1016/j.ijepes.2020.105951).
- [39] C. Vallianos, A. Athienitis, and J. Rao, "Hybrid ventilation in an institutional building: Modeling and predictive control," *Building Environ.*, vol. 166, Dec. 2019, Art. no. 106405, doi: [10.1016/j.buildenv.2019.106405](https://doi.org/10.1016/j.buildenv.2019.106405).
- [40] Z. Wang and J. Wang, "Ultra-local model predictive control: A model-free approach and its application on automated vehicle trajectory tracking," *Control Eng. Pract.*, vol. 101, Aug. 2020, Art. no. 104482, doi: [10.1016/j.conengprac.2020.104482](https://doi.org/10.1016/j.conengprac.2020.104482).
- [41] X. Yin, X. Zhao, J. Lin, and A. Karcianas, "Reliability aware multi-objective predictive control for wind farm based on machine learning and heuristic optimizations," *Energy*, vol. 202, Jul. 2020, Art. no. 117739, doi: [10.1016/j.energy.2020.117739](https://doi.org/10.1016/j.energy.2020.117739).
- [42] H. Garoosih, A. Ahmadi, and H. Bayat, "The assessment of Levenberg–Marquardt and Bayesian Framework training algorithm for prediction of concrete shrinkage by the artificial neural network," *Cogent Eng.*, vol. 6, no. 1, pp. 1–14, 2019, doi: [10.1080/23311916.2019.1609179](https://doi.org/10.1080/23311916.2019.1609179).
- [43] K. Levenberg, "A method for the solution of certain non-linear problems in least squares," *Quart. Appl. Math.*, vol. 2, no. 2, pp. 164–168, Jul. 1944, doi: [10.1090/qam/10666](https://doi.org/10.1090/qam/10666).
- [44] W. M. Donald, "Society for industrial and applied mathematics (A5)," *J. Soc. Ind. Appl. Math.*, vol. 11, no. 2, pp. 431–441, 1963, doi: [10.1126/science.151.3712.859-b](https://doi.org/10.1126/science.151.3712.859-b).

- [45] I. S. Kim, Q. Q. Wu, J. H. Lee, J. P. Lee, M. H. Park, and Y. S. Kim, "The optimal Levenberg-Marquardt algorithm to predict welding quality using mahalanobis distance theory," *Adv. Mater. Res.*, vol. 936, pp. 1873–1877, Jun. 2014, doi: [10.4028/www.scientific.net/AMR.936.1873](https://doi.org/10.4028/www.scientific.net/AMR.936.1873).
- [46] M. Billah, S. Waheed, and A. Hanifa, "Stock market prediction using an improved training algorithm of neural network," in *Proc. 2nd Int. Conf. Electr., Comput. Telecommun. Eng. (ICECTE)*, Dec. 2016, pp. 8–10, doi: [10.1109/ICECTE.2016.7879611](https://doi.org/10.1109/ICECTE.2016.7879611).
- [47] K. C. Keong, M. Mustafa, A. J. Mohammad, M. H. Sulaiman, N. R. H. Abdullah, R. Samad, and D. Pebrianti, "Levenberg-Marquardt flood prediction for sungai isap residence," in *Proc. IEEE Conf. Syst., Process Control (ICSPC)*, Dec. 2016, pp. 160–165, doi: [10.1109/SPC.2016.7920722](https://doi.org/10.1109/SPC.2016.7920722).
- [48] T. Multazam, R. I. Putri, M. Pujiantara, V. Lystianingrum, A. Priyadi, and M. Heryp, "Short-term wind speed prediction base on backpropagation Levenberg-Marquardt algorithm; case study area nganjuk," in *Proc. 5th Int. Conf. Instrum., Commun., Inf. Technol., Biomed. Eng. (ICICI-BME)*, Nov. 2017, pp. 163–166, doi: [10.1109/ICICI-BME.2017.8537769](https://doi.org/10.1109/ICICI-BME.2017.8537769).
- [49] J. Qiao, L. Wang, C. Yang, and K. Gu, "Adaptive Levenberg-Marquardt algorithm based echo state network for chaotic time series prediction," *IEEE Access*, vol. 6, pp. 10720–10732, 2018, doi: [10.1109/ACCESS.2018.2810190](https://doi.org/10.1109/ACCESS.2018.2810190).
- [50] N. Zhang and P. K. Behera, "Solar radiation prediction based on recurrent neural networks trained by Levenberg-Marquardt backpropagation learning algorithm," in *Proc. IEEE PES Innov. Smart Grid Technol. (ISGT)*, Jan. 2012, pp. 1–7, doi: [10.1109/ISGT.2012.6175757](https://doi.org/10.1109/ISGT.2012.6175757).
- [51] S. Mammadli, "Financial time series prediction using artificial neural network based on Levenberg-Marquardt algorithm," *Procedia Comput. Sci.*, vol. 120, pp. 602–607, Jan. 2017, doi: [10.1016/j.procs.2017.11.285](https://doi.org/10.1016/j.procs.2017.11.285).
- [52] X. Shi, Y. Feng, J. Zeng, and K. Chen, "Chaos time-series prediction based on an improved recursive Levenberg-Marquardt algorithm," *Chaos, Solitons Fractals*, vol. 100, pp. 57–61, Jul. 2017, doi: [10.1016/j.chaos.2017.04.032](https://doi.org/10.1016/j.chaos.2017.04.032).
- [53] D. Baptista and F. Morgado-Dias, "Comparing different implementations for the Levenberg-Marquardt algorithm," in *Proc. 10th Port. Conf. Autom. Control*, Jul. 2012, pp. 15–20. [Online]. Available: <http://www.apca.pt/publicacoes/6/paper12.pdf>
- [54] S. Jakovlev, "Use case of quay crane container handling operations monitoring using ICT to detect abnormalities in operator actions," in *Proc. Vehits*, 2020, pp. 63–67, doi: [10.5220/0008880700630067](https://doi.org/10.5220/0008880700630067).
- [55] I. Harrison, S. Pietrosanti, A. Luque, R. Mayer, and W. Holderbaum, "Recording and analysing measurements from an RTG crane," *Measurement*, vol. 125, pp. 284–293, Sep. 2018, doi: [10.1016/j.measurement.2018.04.089](https://doi.org/10.1016/j.measurement.2018.04.089).
- [56] L. Wu and W. Ma, "Quay crane scheduling with draft and trim constraints," *Transp. Res. E, Logistics Transp. Rev.*, vol. 97, pp. 38–68, Jan. 2017, doi: [10.1016/j.tre.2016.10.011](https://doi.org/10.1016/j.tre.2016.10.011).
- [57] D. Liu and Y.-E. Ge, "Modeling assignment of quay cranes using queueing theory for minimizing CO₂ emission at a container terminal," *Environment*, vol. 61, pp. 140–151, Jun. 2018, doi: [10.1016/j.trd.2017.06.006](https://doi.org/10.1016/j.trd.2017.06.006).
- [58] S. Jakovlev, T. Eglynas, M. Jusis, S. Gudas, E. Pocevicus, and V. Jankunas, "Analysis of the efficiency of quay crane control," in *Proc. 7th IEEE Workshop Adv. Inf., Electron. Elect. Eng.*, Nov. 2020, pp. 1–3, doi: [10.1109/aiee48629.2019.8977009](https://doi.org/10.1109/aiee48629.2019.8977009).
- [59] C. Liu, "Iterative heuristic for simultaneous allocations of berths, quay cranes, and yards under practical situations," *Transp. Res. E, Logistics Transp. Rev.*, vol. 133, Jan. 2020, Art. no. 101814, doi: [10.1016/j.tre.2019.11.008](https://doi.org/10.1016/j.tre.2019.11.008).
- [60] G. Tasoglu and G. Yildiz, "Simulated annealing based simulation optimization method for solving integrated berth allocation and quay crane scheduling problems," *Simul. Model. Pract. Theory*, vol. 97, pp. 1–29, 2019, doi: [10.1016/j.simpat.2019.101948](https://doi.org/10.1016/j.simpat.2019.101948).
- [61] M. Arnold, R. R. Negenborn, G. Andersson, and B. De Schutter, "Multi-area predictive control for combined electricity and natural gas systems," in *Proc. Eur. Control Conf. (ECC)*, Aug. 2009, pp. 1408–1413, doi: [10.23919/ecc.2009.7074603](https://doi.org/10.23919/ecc.2009.7074603).
- [62] J. Zheng and Y. Zhang, "A fuzzy receding horizon control strategy for dynamic vehicle routing problem," *IEEE Access*, vol. 7, pp. 151239–151251, 2019, doi: [10.1109/ACCESS.2019.2948154](https://doi.org/10.1109/ACCESS.2019.2948154).
- [63] K. Kunisch and L. Pfeiffer, "The effect of the terminal penalty in receding horizon control for a class of stabilization problems," *ESAIM, Control, Optim. Calculus Variat.*, vol. 26, p. 58, Sep. 2020, doi: [10.1051/cocv/2019037](https://doi.org/10.1051/cocv/2019037).
- [64] Ö. Kişi, "Multi-layer perceptrons with Levenberg-Marquardt training algorithm for suspended sediment concentration prediction and estimation," *Hydrol. Sci. J.*, vol. 49, no. 6, pp. 1025–1040, 2004, doi: [10.1623/hysj.49.6.1025.55720](https://doi.org/10.1623/hysj.49.6.1025.55720).
- [65] R. Fletcher, *Practical Methods of Optimization*. Hoboken, NJ, USA: Wiley, 2000.
- [66] M. Baigvand, A. Banakar, S. Minaei, J. Khodaei, and N. Behrooz-Khazaei, "Machine vision system for grading of dried figs," *Comput. Electron. Agricult.*, vol. 119, pp. 158–165, Nov. 2015, doi: [10.1016/j.compag.2015.10.019](https://doi.org/10.1016/j.compag.2015.10.019).



SERGEJ JAKOVLEV was born in Lithuania. He received the bachelor's degree in informatics engineering and the master's degree from the Faculty of Marine Technologies, Klaipeda University, in 2009 and 2011, respectively, and the Ph.D. degree in transport engineering from Lithuanian Joint Transport Engineering Ph.D. Program (KU, VGTU, and ASU), in 2016. He currently works as a Senior Researcher with the Marine Research Institute, Klaipeda University, and IT4Innovations National Supercomputing Center, VSB–Ostrava Technical University. He is the author or coauthor of more than 50 articles, included in SCOPUS and CA. His research interests include intelligent control systems, AI theory and applications, big data analytics tools and methods, operations research, and wireless sensor networks. He is a member of several editorial boards (international conferences, such as the International Science Conference on Computer Networks) and a reviewer of highly ranked CA and SCOPUS journals (such as *Soft Computing* and *IEEE TRANSACTIONS ON NEURAL NETWORKS AND LEARNING SYSTEMS*).



TOMAS EGLYNAS was born in Lithuania. He received the bachelor's degree in informatics engineering and the master's degree from the Faculty of Marine Technologies, Klaipeda University, in 2010 and 2012, respectively, and the Ph.D. degree in transport engineering from Lithuanian Joint Transport Engineering Ph.D. Program (KU, VGTU, and ASU), in 2017. He currently works as a Researcher with the Marine Research Institute, Klaipeda University, and the CEO of Inotecha, Lithuania, where he developing intelligent solutions for industry. He is the author or coauthor of more than ten articles, included in SCOPUS and CA. His research interests include intelligent transportation systems, logistics 4.0, control theory, electronics, the IoT, and industry 4.0.



MIROSLAV VOZNAK (Senior Member, IEEE) received the Ph.D. degree in telecommunications from the Faculty of Electrical Engineering and Computer Science, VSB–Technical University of Ostrava, Czech Republic, in 2002, and the Habilitation degree from the VSB–Technical University of Ostrava, in 2009. He was appointed as a Full Professor of electronics and communications technologies, in 2017. He has authored and coauthored over 100 articles indexed in SCI/SCIE journals.

According to the Stanford University, Stanford, CA, USA, study released in 2020, he is one of the World's Top 2% Scientists in networking and telecommunications. His research interests include information and communications technologies, especially on the quality of service and experience, network security, wireless networks, and big data analytics.

...